


Roof Coatings

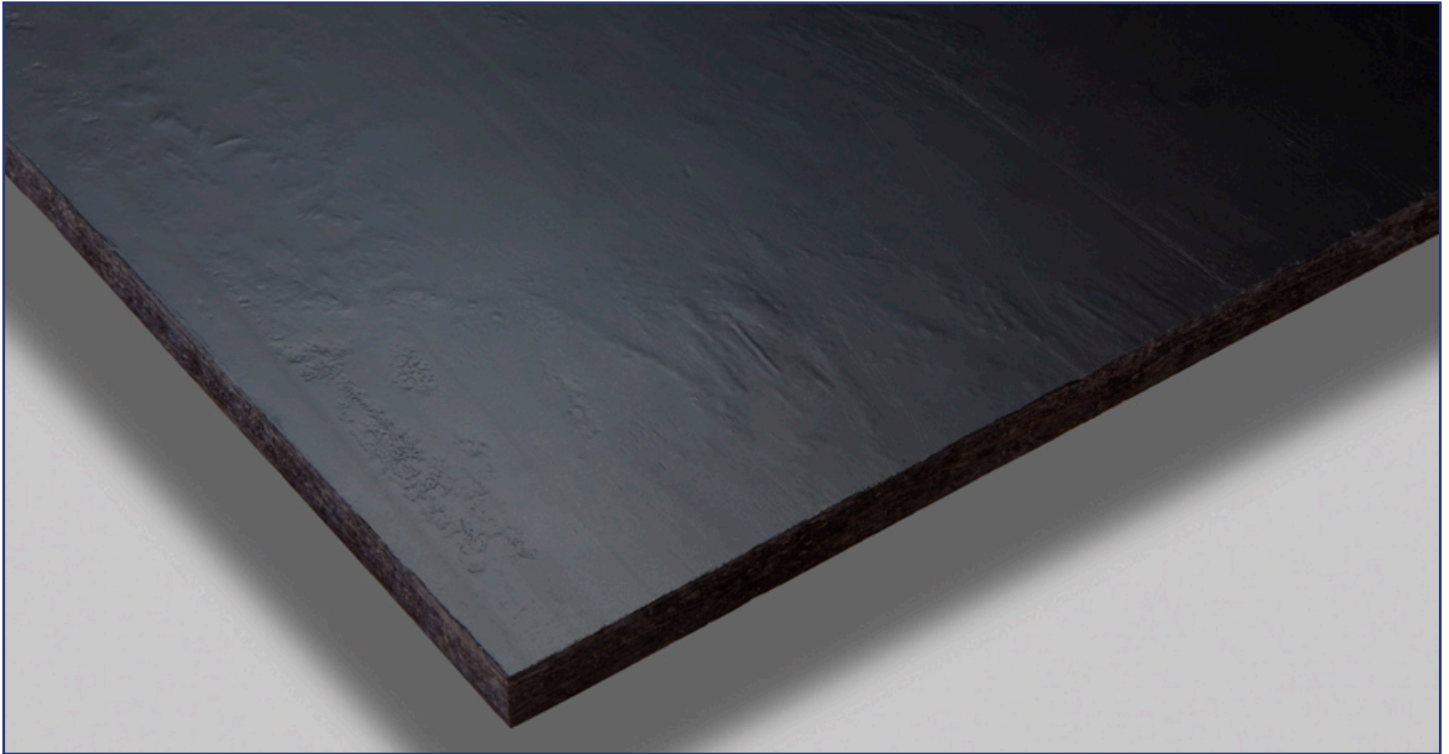

TFS roof coatings can be applied to a wide range of suitable substrates, ideally with BBA approved OSB roof boards. Boards are factory coated for optimum consistency, with a black water resistant coating to the face and edges, plus a thin peel off transparent film.

This offers additional weather protection for the coated board prior to installation of the external membrane. The result is a single operation, quick

and easy to fit solution that is instantly water resistant, achieving significant time and money savings, compared with the alternative of using uncoated boards and a separate waterproofing layer,

The protective film is easy to peel off, or can be burnt off during torching, reactivating the adhesive properties in the coating and assisting the application of traditional roof felt.


Key Product Features

- ✓ Black 'water resistant' coating with 'Peel Off' film
- ✓ Quick and easy fix, used with joint strips to provide speedy weather resistance
- ✓ Suitable substrates include Plywood, OSB and Cementitious boards
- ✓ Provides a high level of water resistance
- ✓ Film is easily removed prior to application of external membrane
- ✓ Ideal for use with self-adhesive felt and membranes
- ✓ Tape available to protect joints & abutments during fit-out
- ✓ Saves time, effort and costs caused through water penetration

Roof Coatings

Typical Applications

- ✓ Traditional Flat Roofing
- ✓ Sectional Building Roofing
- ✓ Agricultural / Livestock Buildings

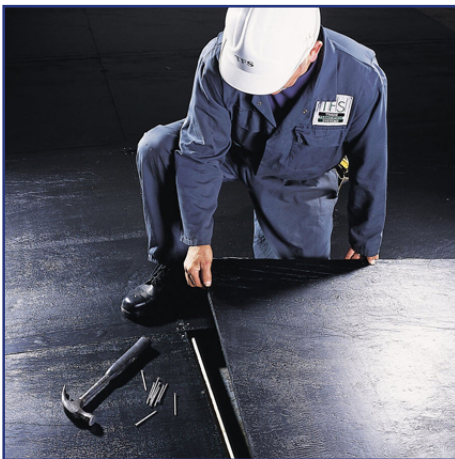

Market Sectors



Agriculture



Construction



DIY



Housing